

300-5130

POWER CLEAN 2.0



300-5130 Power Clean 2.0, 2.1 gpm @ 1100 PSI
Power Rating: 208-240 volts, 50 or 60Hz

FEATURES:

- » 2HP Industrial Motor , Totally-Enclosed, Fan-Cooled
- » 2.1 GPM, 3 Cylinder, Stainless Steel Lined, Ceramic Plunger Pump
- » SSR w/ Integrated LED for Basic System Status
- » Anti-Backflow/Anti-Siphon Protection w/ 2.54cm Air Gap via Water Level Float Tank
- » Low Water Shut-Off protection
- » Thermal Limit Switch for Over Temp Protection (65.55°C Max Water Temp)
- » Includes 91.44cm Dual Nozzle Spray Gun w/ Three High Pressure Nozzles
- » Includes Water Filter Assembly, Replacement Filter Cartridge, and Oil
- » Unit Comes Ready to Wire. **Does Not include Power Cord.**
- » Shipping Weight: 120.65




(800) 548-3373

www.spraymastertech.com

A brand line of
Assembled Products Corporation

115 E Linden • Rogers, Arkansas 72756 USA | Office: (479) 636-5776 • Fax: (479) 636-3245



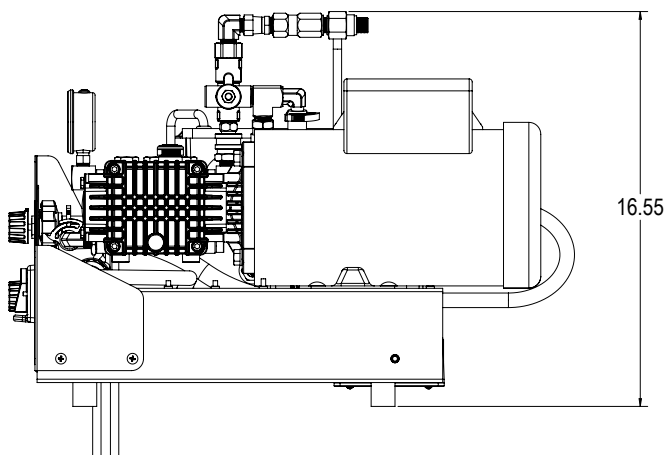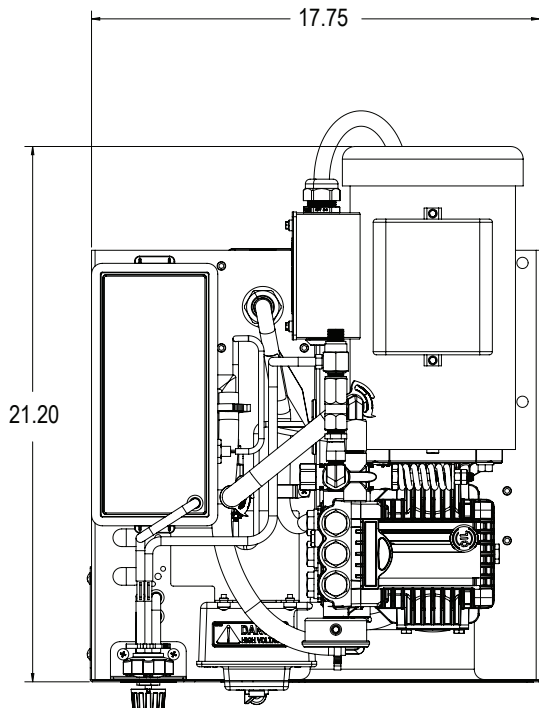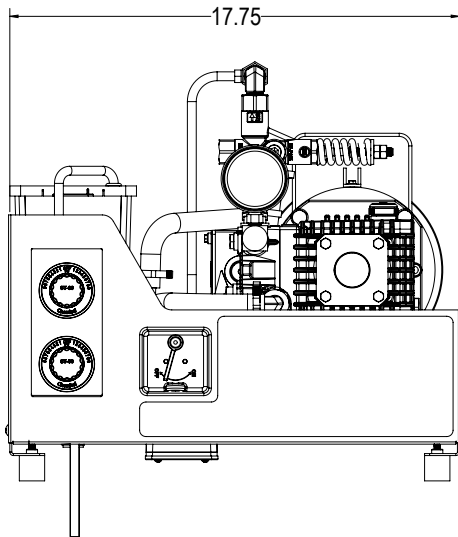

EQUIPMENT SPECS:

CLEARANCES

» Left Side	25.4cm
» Right Side	25.4cm
» Overhead	53.34cm
» Above Finished Floor	91.4cm
» Front	40.64cm

PLUMBING

3/4" / 2cm Hose Bib with 5 gpm / .14Lpm @ Min. 30 to 80 psi / 20.6 to 5.5 bars. If Warm Water is required, 65.5° C Max.

ELECTRICAL

One (1) 208-240 volts, 50 or 60Hz, Single Phase 20A, GFCI Protected 'Dedicated Circuit'

CHEMICAL DILUTION

Dual Chemical Metering Valves accurately adjust chemical metering to your chemical specifications.

INSTALLATION SPECS:

ELECTRICAL

One (1) 208-240 volts, 50 or 60Hz, Single Phase 20A, GFCI Protected 'Dedicated Circuit'

WATER

One (1) water outlet with standard 3/4" / 1.9cm hose bib with shut-off valve. A pressure gauge in the water line can be helpful although it is not mandatory. A minimum of 5 gal / 19L per minute and a line pressure not less than 30 psi / 20.6 bars, and not more than 80psi / 5.5 bars, is required.

(Option: if warm water outlet is needed 65.5° C MAX)


LOCATION

Heated utility room or closet with ventilation. Minimum 24" / 60.96cm clearance above unit is required. The unit can be serviced without removing it from the wall.

GENERAL RECOMMENDATIONS

Floor drains are essential in new facilities to receive the greatest utilization and maximum efficiency of your **Spray Master** pressure washer. Materials and wall coverings which can be cleaned with pressurized water are desirable. Locate electrical outlets above washing areas.

SINGLE UNIT ON WALL MOUNT BRACKETS

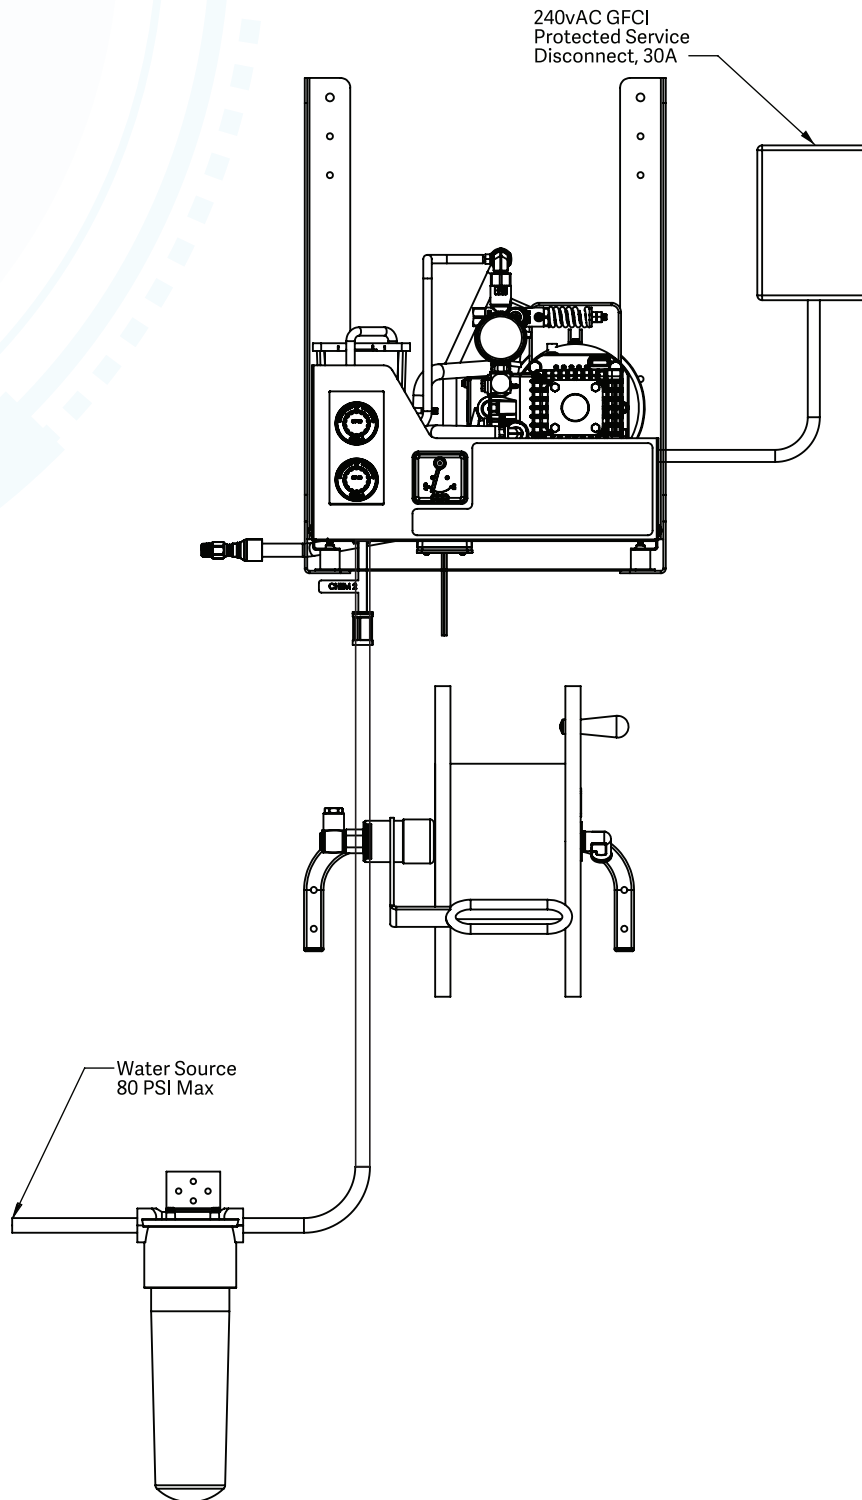

SYSTEM REQUIREMENTS:

NOTE: Electrical, Water, and Backing are not supplied by Spray Master.

- » One (1) 208-240 volts, 50 or 60Hz, Single Phase 20A, GFCI Protected Dedicated Circuit, for each unit
- » 1.905cm Backing required in studded walls

AMBIENT WATER SUPPLY

Recommended Temp: Cold water, 5 gpm @ minimum (30-60 psi) with a maximum of 80 PSI with 1.905cm Hose Bib (*one for each unit*)

Maximum Temp: 65.5° C, 5 gpm @ minimum (30-60 psi) with a maximum of 80 psi with a 1.905cm Hose Bib (*one for each unit*)



www.spraymastertech.com